



ESA Energy Systems Associates, Inc.
 1111 N IH35, Suite 212
 Round Rock, Texas 78664



September 19, 2016

ADDENDUM #2



IFB 17-07 HVAC System Replacement and Renovation West Loop Campus Project (LoanSTAR #1)

To all prospective proposers:

Please find the attached addendum #2 for the identified project.

ITEM #1: Fire dampers at corridor duct penetrations.

Please supply and install the following fire dampers at the indicated corridor duct penetrations at West Loop campus:

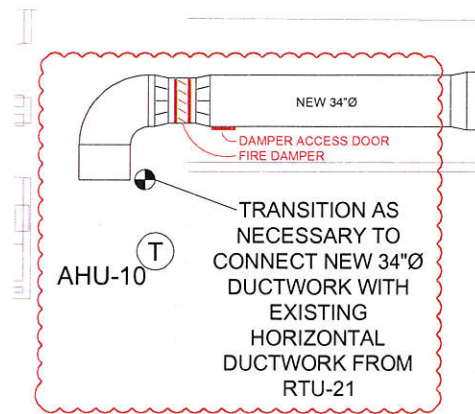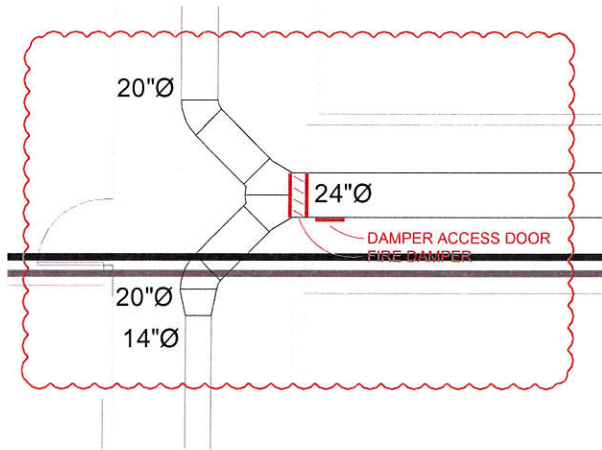

AHU	Duct	Duct Size	Dampers	Make and Model (pr Engineer approved equal)
9	Supply	24" Round	24"	Ruskin FDR25 Round Fire Damper Damper
10	Supply	34"ø to 30x30	1 each 30x30	Ruskin DFD35 Multiple Blade Dynamic Fire Damper

Include 16x12 damper access/inspection door [Ruskin AHR24] each supply duct damper location on most-accessible side of damper.

Note that 34" round duct will require transition to 30x30 duct immediately before and after installation of fire damper at wall penetration.

ITEM #2: Smoke detectors at new air handlers.

Please supply and install a smoke detector in the return air duct of each air handler that will de-energize air handling unit upon detection of smoke.

ITEM #3: Add Humiditrol package and smoke detector to new RTU #1 schedule Drawing WL-8.

Manufacturer to supply Humiditrol dehumidification package to RTU supplied to replace RTU #1. Note that Humiditrol package will remove requirement for Environ coil system and replace it with conventional fin/tube condenser coil. Supply factory option smoke detector to de-energize unit upon detection of smoke.

End of Addendum #2. Prepared by Chris Carter. Reviewed and sealed by Brian Clark.